

Rec'd

PTO

25 FEB 2005

10/525661

PCT / IB 03 / 03290




Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

21 JUL 2003

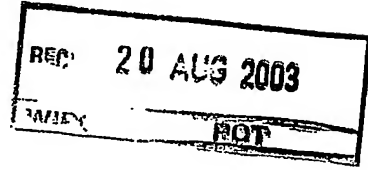

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°  
02078567.1

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



Anmeldung Nr:  
Application no.: 02078567.1  
Demande no:

Anmeldetag:  
Date of filing: 30.08.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Fingerprint embedding

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06T/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Fingerprint embedding

EPO - DG 1

30.08.2002

(94)

## FIELD OF THE INVENTION

The invention relates to a method and an arrangement for embedding a fingerprint identifying media content into a media transmission signal used for transmission of said media content.

5 The invention also relates to a method and arrangement for retrieving a fingerprint from a media transmission signal used for transmission of said media content, and a method and arrangement for verifying the authenticity of media content.

## 10 BACKGROUND OF THE INVENTION

A fingerprint, in the literature also often referred to as signature or hash, is a sequence of bits that is derived from multimedia content, e.g. an audio song, an image, a video clip, etc., and summarizes or identifies said media content.

15 Fingerprints are used, inter alia, in the field of authentication where it is desired to verify whether received content is original or detect whether the content has been tampered. To this end, a fingerprint being derived from the received content is compared with the original content's fingerprint. In this application, it is desired to transmit the original fingerprint along with the content that it was derived from.

20 International patent application WO 01/23981 summarizes a number of known methods of transmitting the fingerprint of a digital data work along with the content. The fingerprint can be transmitted as a separate file or embedded in the data file of the digital data work. In the latter case, the fingerprint can be accommodated in a header of the file, appended to the end of the file, or embedded in the content in the form of an embedded watermark. The fingerprint is preferably encrypted.

25 Embedding the fingerprint into the content by watermarking has the advantage of allowing transport of the fingerprint through existing processing chains. With careful design, a watermark can be sufficiently robust to allow correct extraction of the embedded fingerprint even after compression and analogue/digital conversion. However, the size of a fingerprint increases rapidly with improved accuracy of its representation of the content. An

application such as authentication requires a relatively large fingerprint in order to provide good localization of tampered sections of the content. Robust watermarking schemes typically have a limited payload.

5

## OBJECT AND SUMMARY OF THE INVENTION

It is an object of the invention to provide an improved method of method of embedding a fingerprint identifying media content into a media transmission signal used for transmission of said media content.

10

To this end, the method in accordance with the invention comprises the steps of converting said fingerprint into a format that the media transmission signal provides for transmission of said media content, and accommodating the converted fingerprint in a predetermined part of the media transmission signal not being used for transmission of said media content.

15

With the invention is achieved that the fingerprint can be accommodated in existing standard media transmission formats without requiring any modification of said signal formats or increasing the length of the signal. The method has the same advantage as the prior art method of watermark embedding (allowing transport of the fingerprint through existing processing chains), but does not suffer from payload limitations.

20

Some transmission formats have spare capacity for the accommodation of media content. For example, television signals have a vertical blanking interval in which content can be transmitted, but such content will not be displayed by standard television receivers. In an embodiment of the method in accordance with the invention, the fingerprint of a video image or a series of video images is accommodated in lines of said vertical blanking interval, possibly in a manner which is compatible with the well-known teletext data transmission.

25

30

If the transmission format does not provide such spare capacity, a small part of the media contents can be sacrificed to create space for the fingerprint. For example, a few lines at the upper and/or lower border of a video image can be used to accommodate the converted fingerprint of (the rest of) the video image. Said few lines are normally not visible on the screen of a standard television receiver. To this end, an embodiment of the method in accordance with the invention comprises the steps of dividing the media content in a first part and a second part, deriving the fingerprint from the first part of said media content, and replacing the second part of said media content by the converted fingerprint.

## BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments shown in the drawing, in which:

Fig. 1 shows schematically a video surveillance system including an  
5 arrangement for embedding fingerprints in accordance with the invention.

Fig. 2 shows a flowchart of operations carried out by a conversion circuit which is shown in Fig. 1.

Figs. 3 and 4 show diagrams to illustrate the operation of an embodiment of the method in accordance with the invention.

10 Fig. 5 shows a flowchart of operations carried out by an arrangement for verifying the authenticity of media content in accordance with the invention.

## DESCRIPTION OF EMBODIMENTS

15 The invention will be described with reference to a video surveillance system. Fig. 1 shows schematically a typical layout of such a system. It comprises one or more surveillance cameras 1, each of which delivers a video signal in a standard analogue (PAL, NTSC) signal format. Each video signal is applied to a fingerprint extraction and embedding unit 2. A digital recorder 3 records the signals in compressed form. A computer 4 provides  
20 access to the stored video signals for retrieval, viewing and authentication. The ability to authenticate images captured by the cameras will increase the value of these images as evidence in a court of law.

The fingerprint extraction and embedding unit 2 comprises an extraction circuit 21 for deriving a fingerprint FP from each video image and embedding it into the  
25 camera signal. The unit 2 is preferably located inside the camera 1 to prevent tampering before fingerprint calculation. The fingerprint FP is a sequence of bits that summarizes the image content. It is generated such that a tampered version of the same image gives a substantially different fingerprint, but an image processed by allowable manipulations, such as compression, does not. Many methods of deriving fingerprints from audio and video  
30 material are known in the art. A practical embodiment of the extraction circuit 21 that can be used in the system is described in Job Oostveen, Ton Kalker and Jaap Haitzma, "Visual Hashing of Digital Video: Applications and Techniques", SPIE, Applications of Digital Image Processing XXIV, July 31 - August 3 2001, San Diego, USA. The extracted fingerprint FP is encrypted by an encryption circuit 22. The encrypted fingerprint is

converted, by a converter stage 23, into the same format as used for the transmission of the video image. In this example, the converter stage 23 converts the fingerprint into image pixels and accommodates said pixels into one or more conventional analogue television lines. The fingerprint is subsequently inserted in the television signal by an insertion circuit 24. In

5 Fig. 1, the insertion circuit 24 is symbolically shown as an adder.

Fig. 2 shows a flowchart of steps carried out by the converter stage 23. In a step 231, the fingerprint bits are grouped into symbols of M bits per symbol. In a step 232, the symbols are grouped into blocks of up to N symbols. In an optional step 233, additional error detection and correction symbols are appended to each block. In a step 234, a preamble and a synchronization word are placed at the start of each block of symbols. A preamble may  
10 be required at the receiver end in order to help the receiver to derive a clock signal identifying the timing of the symbol edges. It is typically a pattern of alternating symbols with the largest difference between them, e.g. 101010 for M=1 or 707070 for M=3. The synchronization word is a pattern of symbols with good autocorrelation properties, used to  
15 mark the end of the preamble and the beginning of fingerprint data. Additionally, the synchronization word prevents problems caused by line jitter introduced by transmission via an analogue link, as it identifies the start of the data, even if the data has moved relative to the beginning of a video line. In a step 235, pulse shaping is applied that maps each sequence of symbols into a continuous signal whose amplitude fits within the range of the video signal.  
20 A typical choice of pulse shape is a 'raised-cosine' pulse. Pulse shaping smoothes out the transitions between data symbols, reduces the bandwidth of the signal, and helps reduce inter-symbol interference when the signal is transmitted via a band-limited channel.

The choice of parameters M and N is dependent upon the processing operations that the embedded fingerprint must survive. The number N of symbols per  
25 television line is chosen such that the signal bandwidth is sufficiently narrow. The number M of bits per symbol provides control over the trade between data rate and bit error rate.

Fig. 3 shows a typical waveform of a fingerprint signal delivered by the converter stage 23. In this example, four signal values can be discerned for the symbol values 0, 1, 2 and 3 (M=2) corresponding to fingerprint bit pairs 00, 01, 10 and 11. A preamble  
30 3030303030 and a synchronization word 33300030030 precede the actual fingerprint data.

The fingerprint signal is finally inserted, by the insertion circuit 24, in lines of the television signal that are suitable for but not used for the transmission of image data. In the case of a conventional PAL or NTSC television signal, the fingerprint signal can be accommodated in lines of the vertical blanking interval in a manner known from teletext. For

M=1 and N=320, the fingerprint signal is even identical to a PAL teletext data signal. This has the advantage that the fingerprint can easily be retrieved by conventional teletext circuitry.

In some circumstances, embedding the fingerprint in lines of the vertical blanking interval may not be appropriate. For example, during MPEG compression these lines will be stripped off. In these cases, the fingerprint data is embedded into the visible portion of the video and replace the actual image content. In practice, the size of the fingerprint is sufficiently small, so that the data will occupy only a small portion of the image, for example, 4 of 288 lines of a PAL field. An example thereof is shown in Fig. 4, where reference numeral 40 denotes the original video image area. In this embodiment, a small region 41 of the original image area is used to accommodate the fingerprint FP being extracted from the image covered by the remainder 42 of the original image area. The region 41 will usually fall outside the visible area of the screen of a conventional television receiver. If the region 41 is visible, then the fingerprint will become manifest as black, gray and white pixels, popularly referred to as 'snow'. The visibility of the embedded fingerprint may be advantageous. It gives the user the visual assurance that the content is protected against tampering.

In many applications, the embedded fingerprint data may be required to survive lossy compression. This requires a bandwidth restriction of the embedded fingerprint signal not only in the horizontal direction (by appropriate selection of the parameters M and N as well as design of the raised cosine filter), but also in the vertical direction. Possible techniques to ensure that the embedded lines of data present low frequencies in the vertical direction are (i) duplicating lines of embedded fingerprint data, and (ii) inserting lines that provide smooth transitions between consecutive lines.

Fig. 5 shows a flowchart of steps carried out by the computer 4 (see Fig. 1) to verify the authenticity of a received image. In a step 51, the part of the television signal into which the fingerprint has been embedded (i.e. the vertical blanking interval or image area 41 in Fig. 4) is selected. In a step 52, the embedded fingerprint FP is retrieved. With reference to the embedding embodiment described above, this step 52 includes a step 521 in which the appended preamble and sync word are used to determine the positions along a television line where the "pixels" representing fingerprint symbols are located, and a step 522 in which the pixel values are converted into respective symbol values (0, 1, 2 or 3 for M=2 as in Fig. 3) by means of slicing (comparing the pixel values with respective thresholds). In a step 53, the image region is selected (e.g. image area 42 in Fig. 4). In a step 54, a fingerprint FP' is

derived from this region in a manner described above. The embedded fingerprint FP and the fingerprint FP' derived from the received image are subsequently compared in a step 55. If they substantially match, the received image is declared authentic (step 56). Otherwise, it is concluded that the image has been tampered (step 57).

- 5                   Disclosed is a method of embedding a fingerprint identifying media content into a media transmission signal used for transmission of said media content. In order to achieve that the embedded fingerprint survives all kinds of analogue and digital processing such as compression, the fingerprint (FP) extracted (21) from the content is converted (23) into the same signal format as used for the transmission of the content. For example, the
- 10 fingerprint derived from a video signal generated by a security camera (1) is converted into image pixels. The fingerprint is subsequently accommodated (24) into a part of the signal being provided, but not being used, for transmission of content. For example, the fingerprint of video images is accommodated in the vertical blanking interval of a television signal. The converted fingerprint may also replace a small part of the original content.



## CLAIMS:

30.08.2002

(94)

1. A method of embedding a fingerprint identifying media content into a media transmission signal used for transmission of said media content, the method comprising the steps of:

- converting said fingerprint into a format that the media transmission signal provides for transmission of said media content, and
- accommodating the converted fingerprint in a predetermined part of the media transmission signal not being used for transmission of said media content.

2. A method as claimed in claim 1, further comprising the steps of:

- dividing said media content in a first part and a second part,
- deriving said fingerprint from the first part of said media content, and
- replacing the second part of said media content by said converted fingerprint.

3. A method as claimed in claim 1, further comprising the step of encrypting the fingerprint.

4. A method as claimed in claim 1, in which the media content is a video image or a sequence of video images and the media transmission signal is a television signal, wherein the converted fingerprint is accommodated in lines of the vertical blanking interval.

5. A method as claimed in claim 4, wherein the converted fingerprint is a teletext data signal.

6. A method as claimed in claim 2, in which the media content is a video image or a sequence of video images and the media transmission signal is a television signal, wherein fingerprint is converted into a video signal and accommodated in overscan lines of the television signal that constitute a border of an area being displayed on the screen of a television receiver.

7. A method of retrieving a fingerprint identifying media content from a media transmission signal used for transmission of said media content, characterized in that the method comprises the step of converting a predetermined part of the media transmission signal not being used for transmission of said media content from a format being used for transmission of said media content into a format representing said first fingerprint.

8. A method as claimed in claim 7, further comprising the steps of:

- dividing the said media content in a first part and a second part,
- retrieving said fingerprint from the first part of said media content.

9. A method as claimed in claim 7, further comprising the step of decrypting the first fingerprint.

10. A method as claimed in claim 7, in which the media content is a video image or a sequence of video images and the media transmission signal is a television signal, wherein said step of converting comprises decoding a teletext signal accommodated in lines of the television signal that are not used for transmission of said video image or video images into said first fingerprint.

11. A method as claimed in claim 8, in which the media content is a video image or a sequence of video images and the media transmission signal is a television signal, wherein said step of converting comprises converting overscan lines of the television signal that constitute a border of an area being displayed on the screen of a television receiver into said first fingerprint.

12. A method of verifying the authenticity of media content, comprising the steps of:

- receiving a media transmission signal representing said media content and a first fingerprint identifying said media content,
- deriving a second fingerprint from the received media content,
- determining that the media content is authentic if the first and second fingerprints resemble each other in a predetermined manner,

characterized in that the step of receiving the first fingerprint comprises converting a predetermined part of the media transmission signal not being used for transmission of said

media content from a format being used for transmission of said media content into a format representing said first fingerprint.

13. An arrangement for embedding a fingerprint identifying media content into a media transmission signal used for transmission of said media content, comprising:

- conversion means for converting said fingerprint into a format that the media transmission signal provides for transmission of said media content, and
- means for accommodating the converted fingerprint in a predetermined part of the media transmission signal not being used for transmission of said media content.

14. An arrangement for retrieving a fingerprint identifying media content from a media transmission signal used for transmission of said media content, characterized in that the arrangement comprises means for converting a predetermined part of the media transmission signal not being used for transmission of said media content from a format being used for transmission of said media content into a format representing said first fingerprint.

15. A computer program for running on a computer, and causing said computer to carry out a method of verifying the authenticity of media content as claimed in claim 12.

16. A media transmission signal comprising media content in a predetermined transmission format, characterized in that a part of said media content in the predetermined transmission format represents a fingerprint derived from and identifying the remaining part of said media content.

## ABSTRACT:

30.08.2002

(94)

Disclosed is a method of embedding a fingerprint identifying media content into a media transmission signal used for transmission of said media content. In order to achieve that the embedded fingerprint survives all kinds of analogue and digital processing such as compression, the fingerprint (FP) extracted (21) from the content is converted (23) into the same signal format as used for the transmission of the content. For example, the fingerprint derived from a video signal generated by a security camera (1) is converted into image pixels. The fingerprint is subsequently accommodated (24) into a part of the signal being provided, but not being used, for transmission of content. For example, the fingerprint of video images is accommodated in the vertical blanking interval of a television signal. The converted fingerprint may also replace a small part of the original content.

See Fig. 1.

1/3

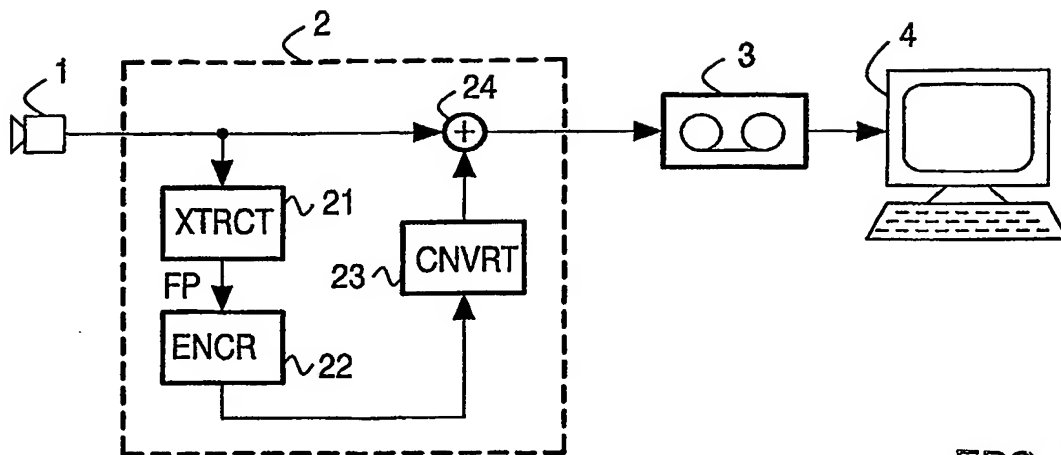


FIG. 1

EPO - DG 1

30.08.902

(94)

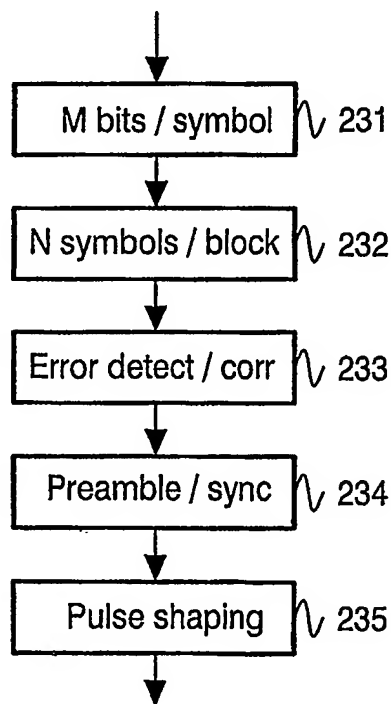


FIG. 2

2/3

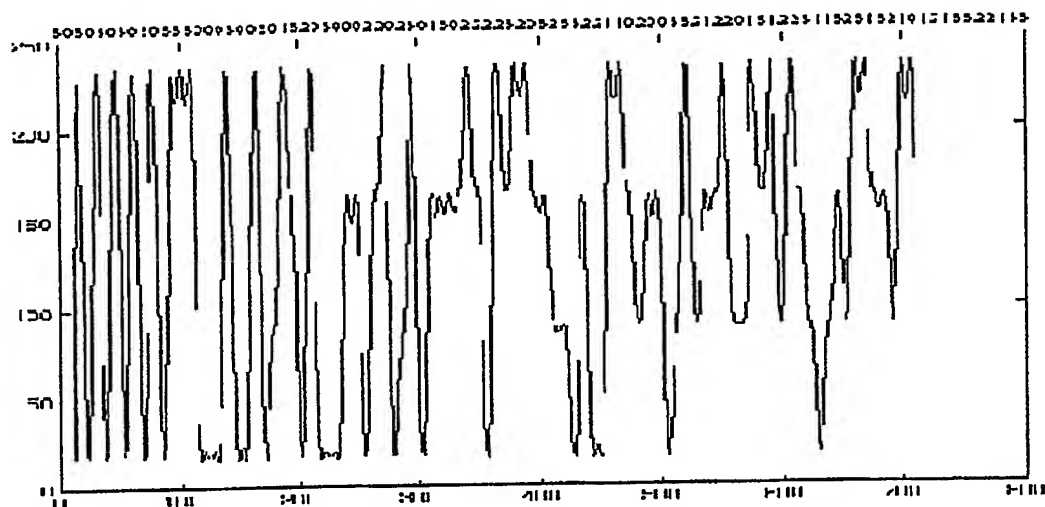


FIG. 3

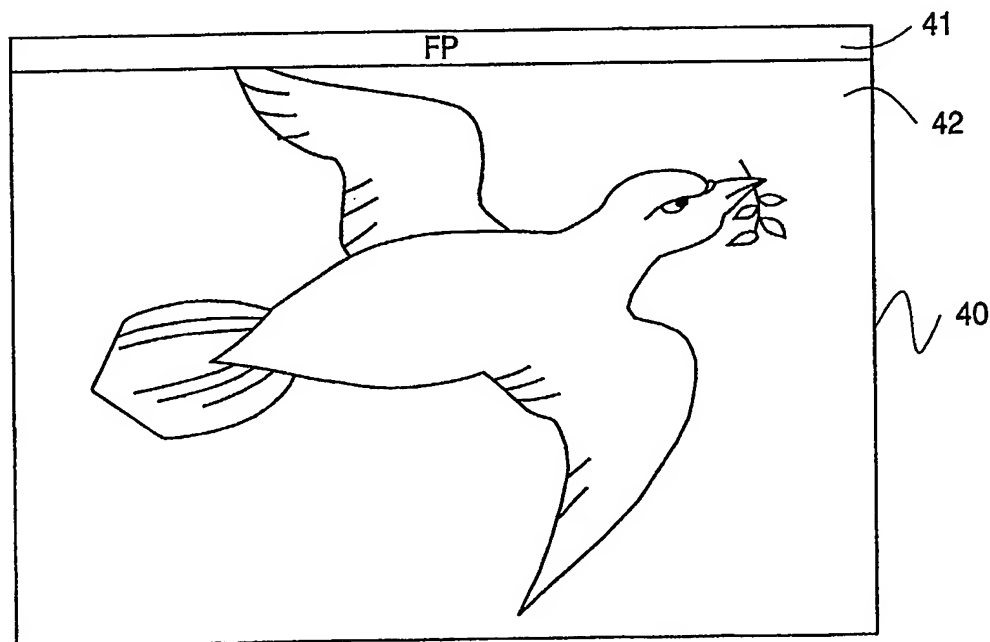


FIG. 4

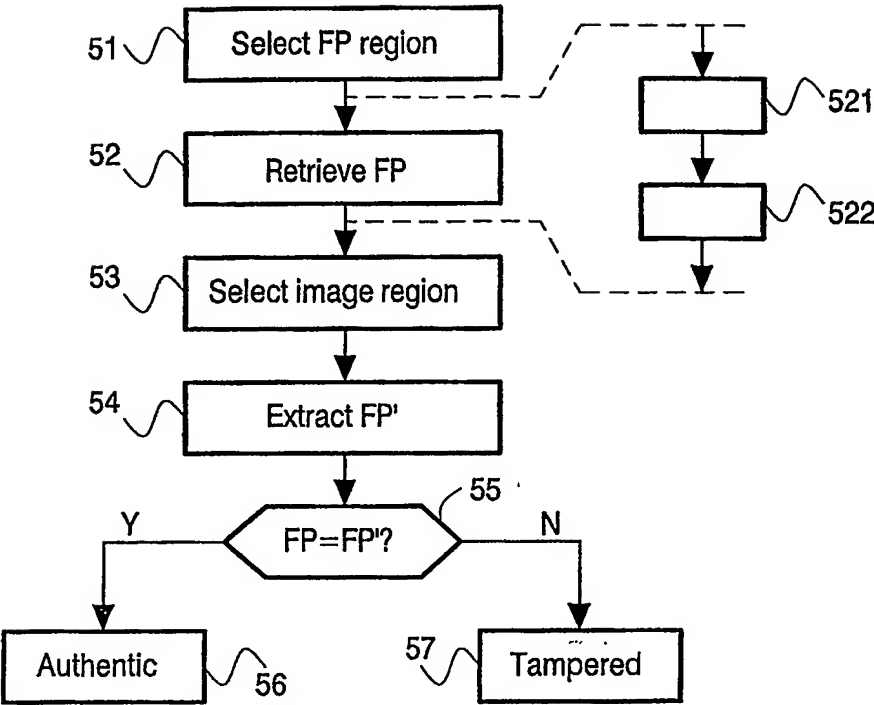


FIG. 5